

- ← City Hall Spirit Square
- ← RCMP Community Police Office
- ← Recreation Centre
- ← Seniors Centre

 **Permit Required For Agricultural Burning In Pitt Meadows**
Spring Burning Season (March 1 to May 31, 2021)





NANO V WATERPROOF LCD MONITOR
10.4", 15", 19", 55" Marine armour IP67 hurricane proof LCD

LJ09-05151A

LJ09-05151B

LJ09-05151B

LJ09-05151B

LJ09-05151B

LJ09-05151B

LJ09-05151B

Product Information

75" Exterior digital display

Model: NMRS-750LH




Features

- 75" 2500cd, sunlight readable
- Anti-reflection tempered, Vandal proof glass
- Remote hardware networking module
 - Remote on/off weather computer is on or off
 - Remote brightness control
 - Remote internal display temperature control
- Front open mechanic for maintenance
- Port: HDMI or DVI, Ethernet
- Security lock key

75" Outdoor Concept drawing



75" Outdoor DID dimension

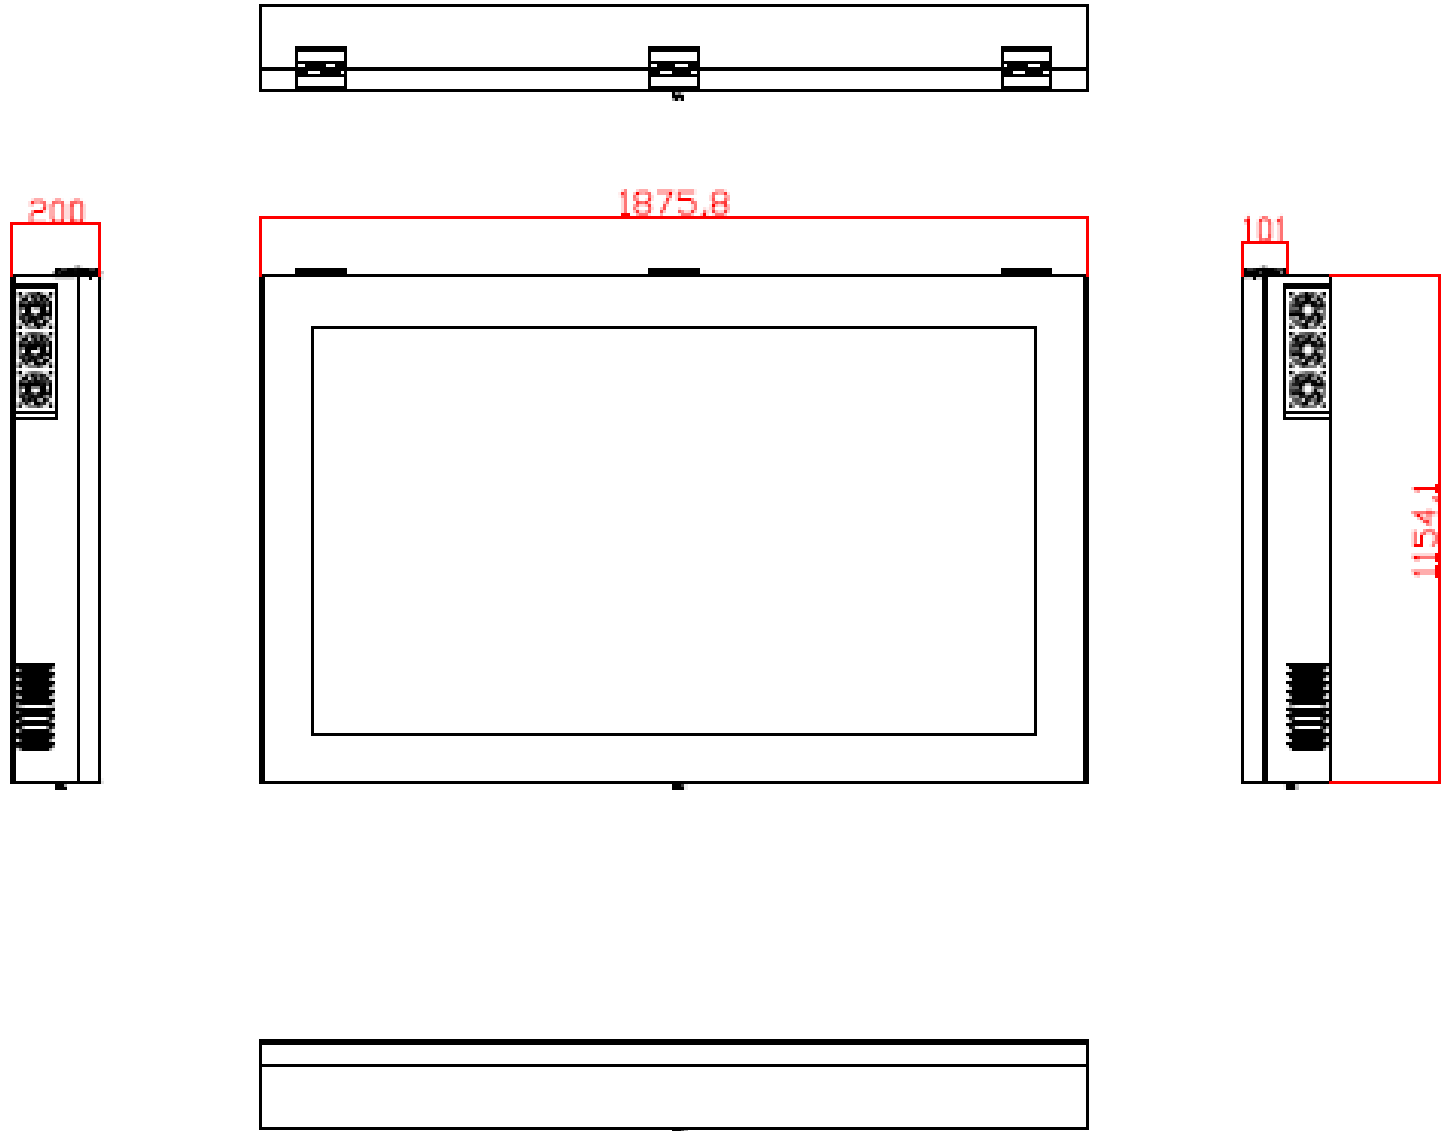

75" Outdoor digital display specification

Spec Category	75" Outdoor 2500cd monitor
Certification (CSA, FCC)	FCC
Model number	NMRS-750LH
Overall physical dimensions	1876(W) * 1154(H) *180(D)mm
Overall screen dimensions	928(W) * 1650(H)mm
Meantime between failure	30,000 hours
Resolution (minimum 720p)	1920 x 1080
Maximum power per Unit	1200W
Average power per Unit	800W
Display weight per Unit	110kg
Input/Outputs	PC Input via 15-Pin Sub "D" 1 HDMI, Ethernet RJ45 DVI :720p/1080i/1080p, RS-232C
Embedded computer, Window 8.1	Not included
Color capability	1.07 Billion (10-bit)
Dimming	50 ~ 100%
Volume (integrated speakers)	No
Color temperature	Warm/Medium/Cool
Calibration	at factory or via rs232c
Refresh rate	60 Hz
Calibrated intensity	2500 cd/m2
Viewing angle (side/side, up/down)	178 degrees / 178 degrees
Contrast ratio	5000:01:00
Run time	20 x 7
Burn timing (one image)	30 minutes
Operation temperature	-20°C ~ 45°C
Ventilation	Yes (Inflow & Exhaust Fan & Heater & Aircon)
Warranty length	12 Months
Outdoor features	IP54
Control board	Auto Cooling System, Auto Brightness Control(50~100%) Auto Power Control(FAN,LCD) Auto Speed Control FAN(0~100%)
Glass	Tempered Glass, Laminated glass 4mm + 4mm Anti Reflection Glass, Anti-Vandal Glass
Housing	Powder coated surface treatment
Humidity	20-80%

75" Outdoor application



Monument signage



Wall mount signage



Pylon signage



Perpendicular signage